

Transfer Tray P 7032, F60

Transfer Tray P 7032, F60

This unit was designed for flush built-in into cash desks. It is intended for indoor use in banks, porters' offices and other cash areas. Due to its flat construction, it can be set in everywhere there, where only a low built-in height is available. Included in delivery is a sealing brush in order to ensure that the unit is rather free of draught.

Security

P 7032 has been tested in fire-resistance classification F60 following* DIN 4102-2 and 4102-5. On request we send you the examination report.

* A division of the transfer tray construction into a fire-resistant classification according to the above stated norm is formally not possible as these norms do not foresee any classification scheme for transfer trays.

Operation

The unit is operated manually. Money carriage and counter moving cover plate lock in their end positions. Unlocking is possible by pushing the slide control next to the handle.

Construction and finish


Robust steel construction with long-living and maintenance-free mechanics. Cover frame and counter moving cover plate with abrasion-resistant structure lacquering (RAL 9005, Jet black). The money carriage with inserted plate is made of stainless steel.

Installation

The unit can be inserted from above into the prepared cut-out of the counter. In order to build in the unit completely flush with the counter, the desk plate can be milled.

The unit has to be supported by e.g. consoles to make sure that the whole weight does not burden on the cover frame.

It should be also possible to dismantle the unit in case of later repairs and maintenance work will be necessary.

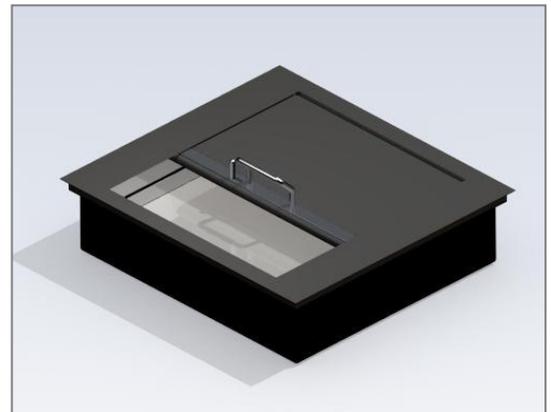

Scope of delivery (Item No.: 100732)

Transfer Tray P 7032, F60 - Standard Jet black
 Inserted stainless steel plate, removable
 Sealing brush to close the gap between cover plate and glass frame

Intercommunication system


We recommend our Intercom System Delta 2.0 to allow customer-friendly communication between operator and customer.

Possible variants

P 7032/VA, frame and counter moving cover plate covered with stainless steel V2a brushed (Item No.: 103768)

Possible are also combinations of the above mentioned units as well as units for thicker walls or with special dimensions, different colours and materials.

Please contact us!

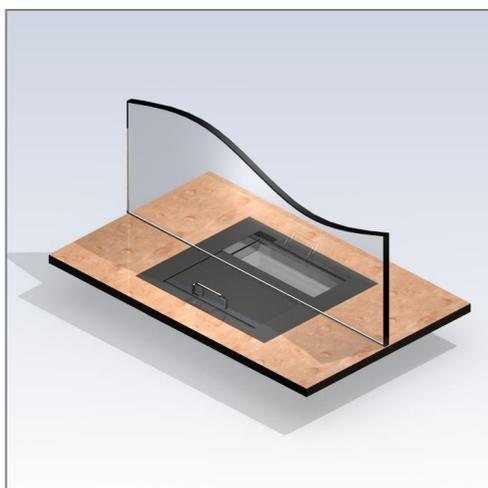

Security:

Fire-resistance F60 following* DIN 4102-2 and DIN 4102-5
 Bulletproof following DIN EN 1522: FB4-NS

Cash desk cut-out:

W x D = 577x 527 mm

Outer dimensions:

W x H x D = 590 x 159 x 540 mm


Inner clearance:

W x H x D = 384 x 86 x 274 mm

With inserted plate H = 30 mm

Required information for order:

Name and Item No.

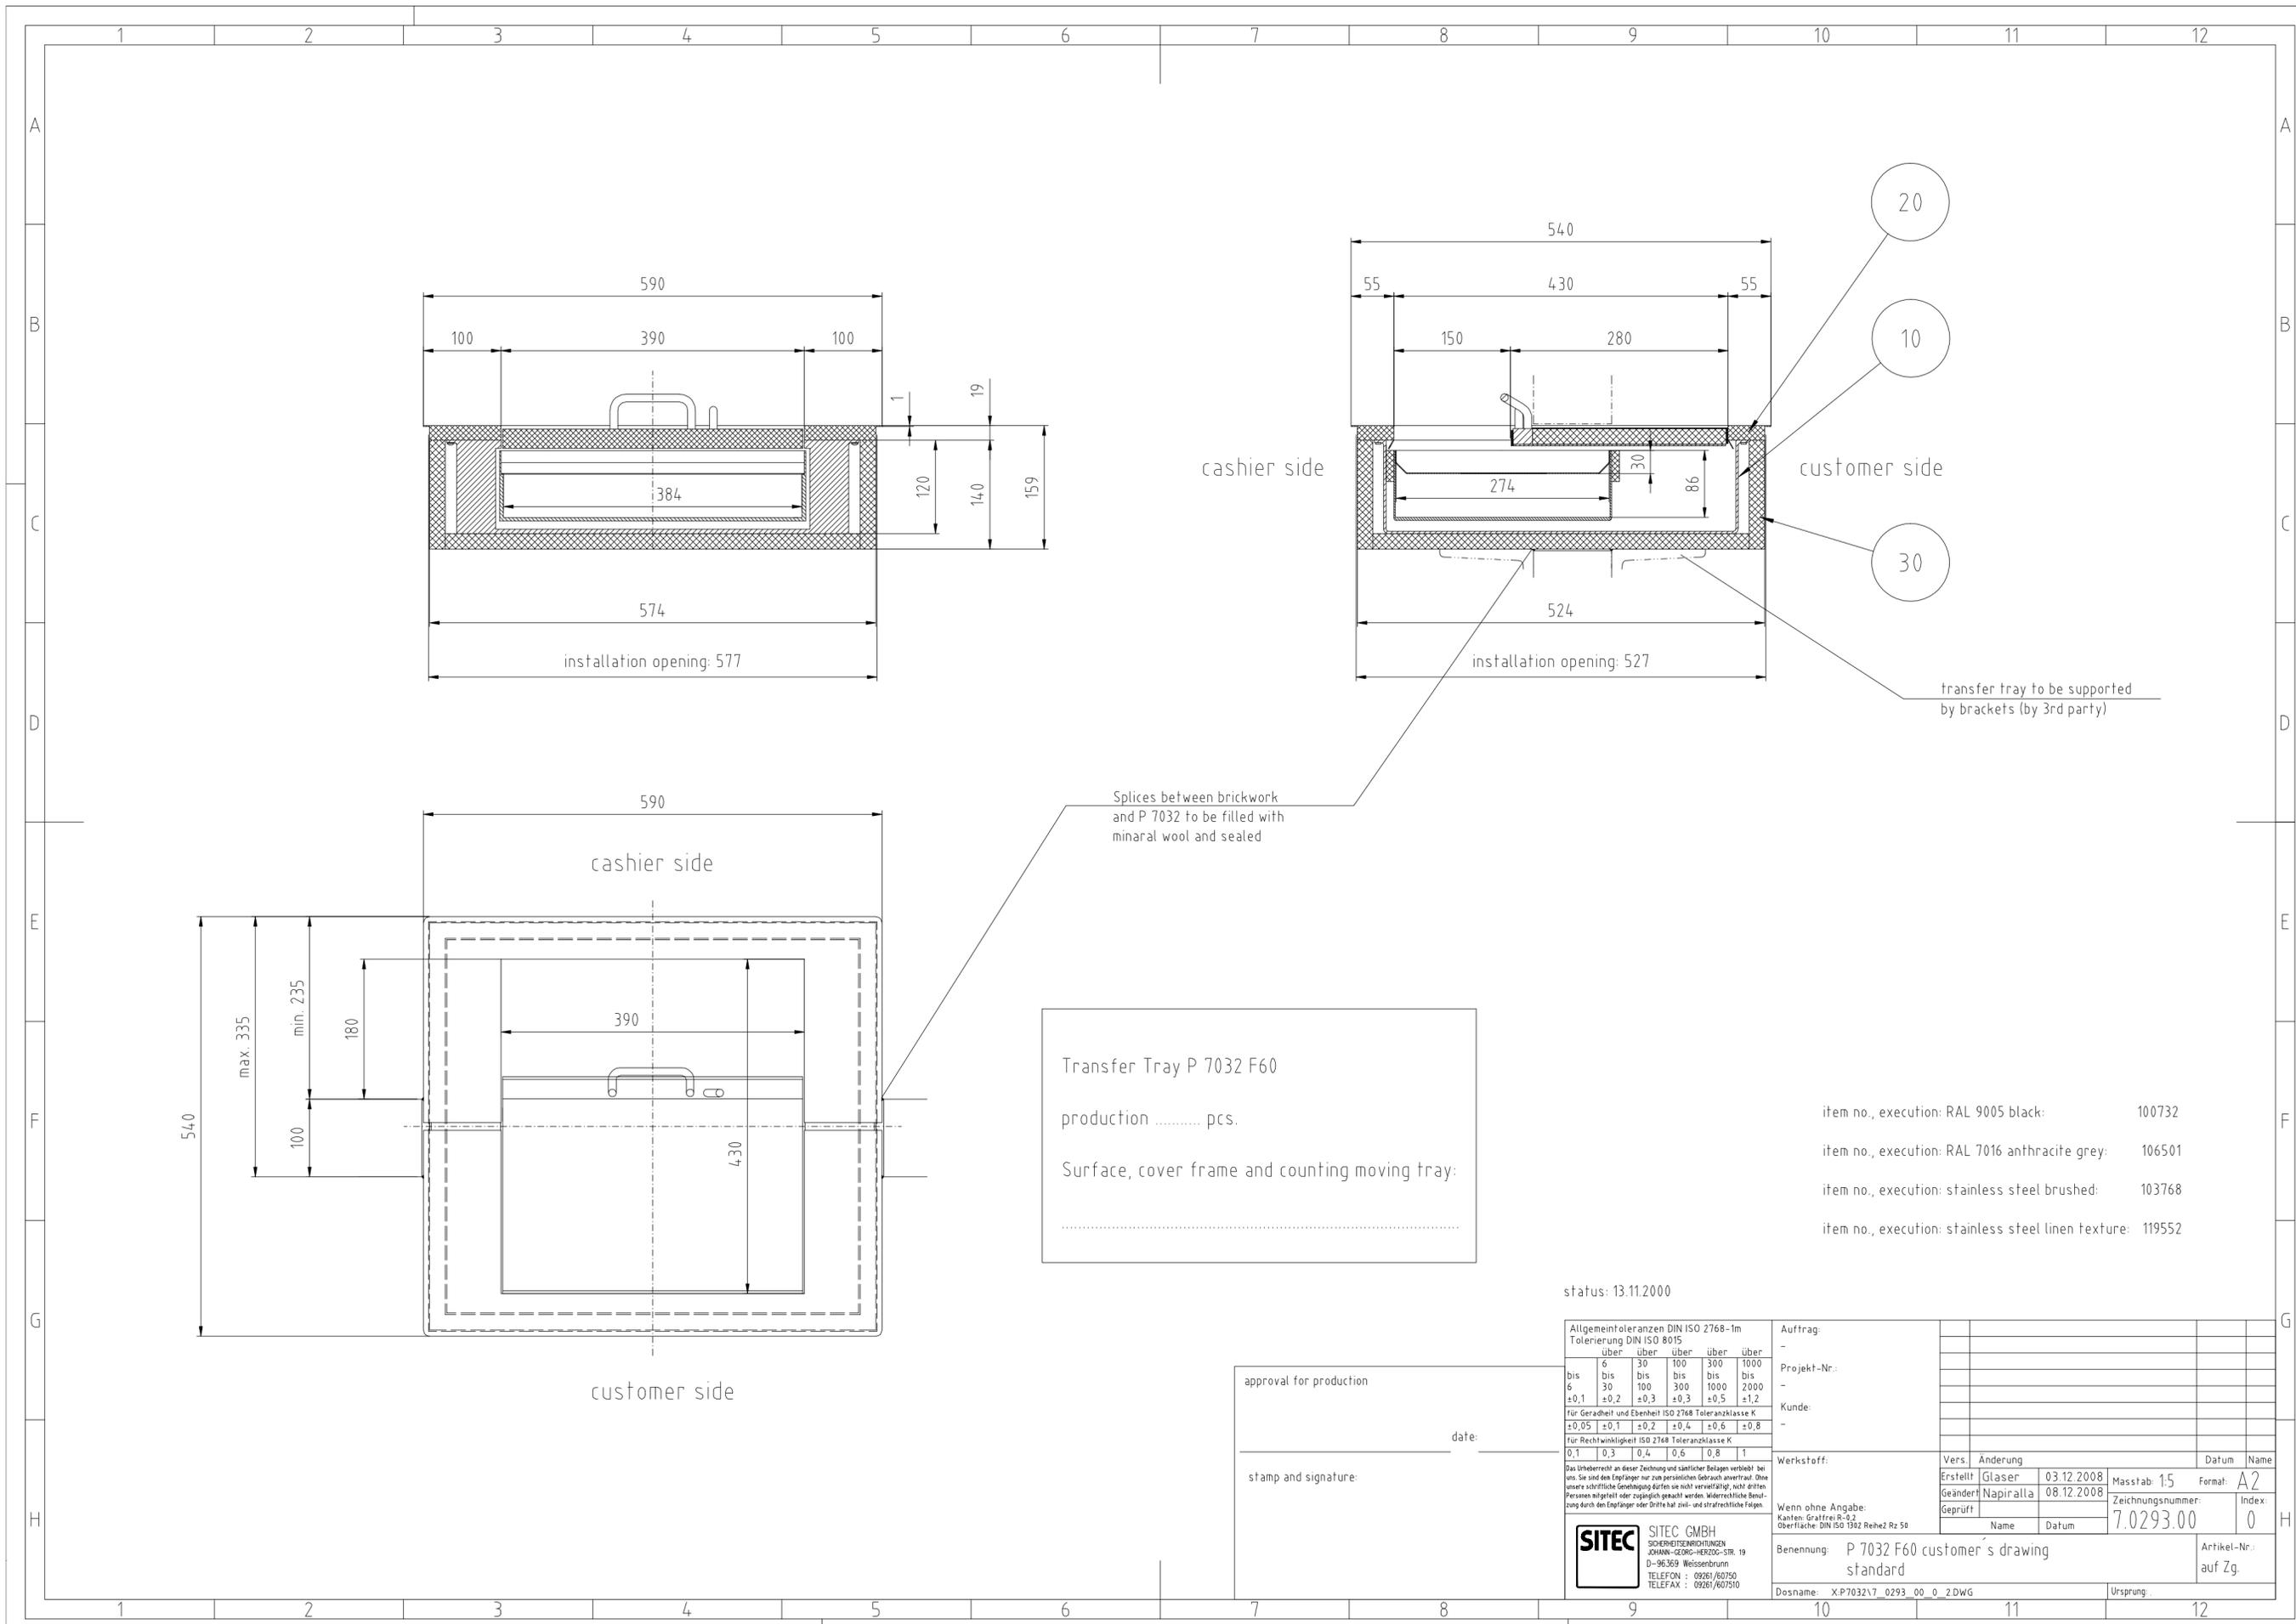

Transfer Tray P 7032 F60
 production pcs.
 Surface, cover frame and counting moving tray:

- item no., execution: RAL 9005 black: 100732
- item no., execution: RAL 7016 anthracite grey: 106501
- item no., execution: stainless steel brushed: 103768
- item no., execution: stainless steel linen texture: 119552

status: 13.11.2000

approval for production _____
 date: _____
 stamp and signature: _____

| Allgemeintoleranzen DIN ISO 2768-1m Tolerierung DIN ISO 8015 | | | | | |
|---|------|------|------|------|------|
| | über | über | über | über | über |
| 6 | 30 | 100 | 300 | 1000 | |
| bis | bis | bis | bis | bis | |
| 6 | 30 | 100 | 300 | 1000 | 2000 |
| ±0,1 | ±0,2 | ±0,3 | ±0,5 | ±1,2 | |
| Für Geradheit und Ebenheit ISO 2768 Toleranzklasse K | | | | | |
| ±0,05 | ±0,1 | ±0,2 | ±0,4 | ±0,6 | ±0,8 |
| Für Rechtwinkligkeit ISO 2768 Toleranzklasse K | | | | | |
| 0,1 | 0,3 | 0,4 | 0,6 | 0,8 | 1 |

| | | | | | |
|--------------------------------------|-----------|-------------------------------|-------------------|--------------|--------|
| Auftrag: | | | | | |
| Projekt-Nr.: | | | | | |
| Kunde: | | | | | |
| Werkstoff: | | | | | |
| Wenn ohne Angabe: | | | | | |
| Kanten: Graffrei R-0,2 | | | | | |
| Oberfläche: DIN ISO 1302 Rehez Rz 50 | | | | | |
| Vers. | Änderung | Datum | Name | | |
| Erstellt | Glaser | 03.12.2008 | Masstab: 1:5 | Format: | A2 |
| Geändert | Napiralla | 08.12.2008 | Zeichnungsnummer: | 7.0293.00 | |
| Geprüft | | | Name | Datum | Index: |
| Benennung: | | P 7032 F60 customer's drawing | | Artikel-Nr.: | |
| standard | | | | auf Zg. | |
| Dosname: X:P7032\7_0293_00_0_2.DWG | | | | Ursprung: | |

