


surface:  
RAL ...  
lacquered

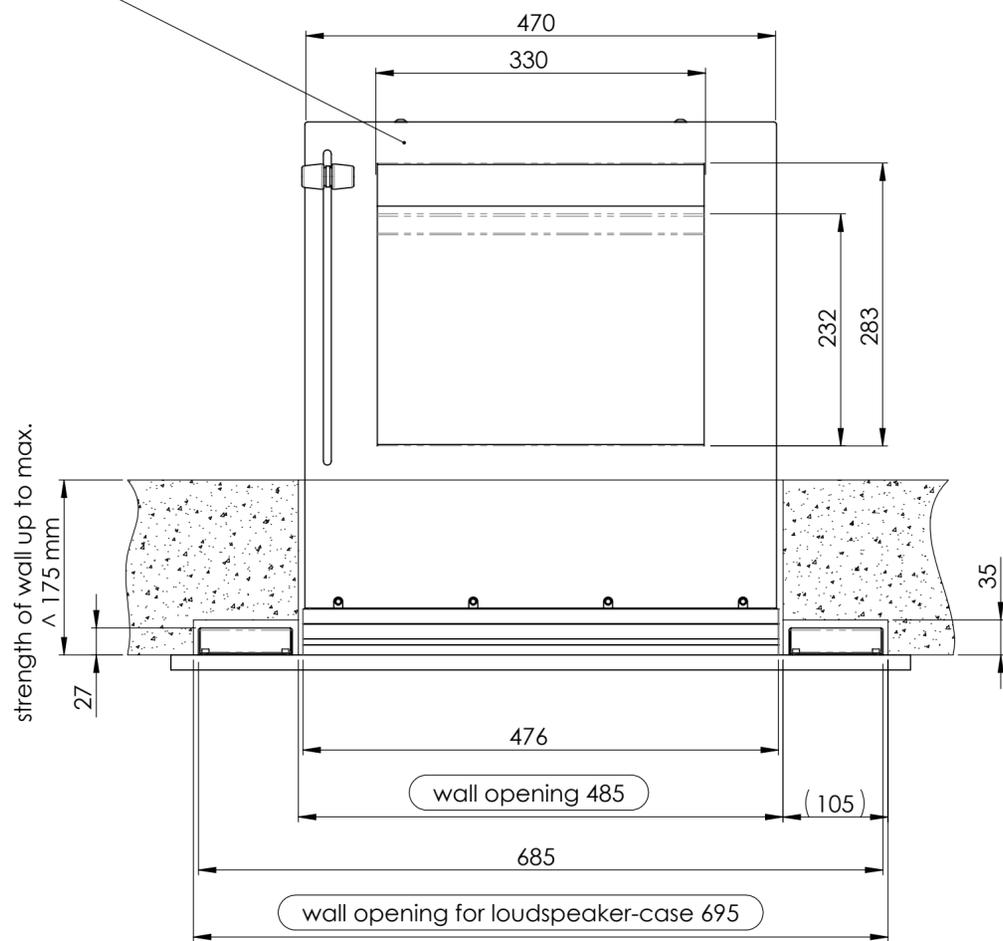

The unit has to be supported at the inner side

Front-opening Counter P7195O EI90 - execution:  
RAL ... lacquered      item number: 147070  
stainless steel brushed      item number: 147465

approval for production \_\_\_\_\_  
date \_\_\_\_\_  
stamp and signature \_\_\_\_\_

From the outside, the front-opening counter will be pushed into the ready cut-out.  
Inside the unit has to be supported. All remaining jointings to the brickwork, resp. glass frame have to be sealed with mineral wool and silicone according to the fire-resistance requirements.

The drive is manually.

Although the unit is produced with greatest care, after long operation repairs might become necessary.  
Therefore it should be possible to pull out the unit to the outside.

Subject to alterations.

Allgemeintoleranzen DIN ISO 2768-1m		Tolerierung DIN ISO 8015	
über 6	über 30	über 100	über 300
bis 6	bis 30	bis 100	bis 300
±0,1	±0,2	±0,3	±0,5
±0,05	±0,1	±0,2	±0,4
0,1	0,3	0,4	0,6

Auftrag:				
Projekt:	P7195O EI90			
Kunde:				
Werkstoff:	ÄNDERUNG	Datum	Name	
Gezeichnet	09.12.2014	Akman		
Geprüft	15.03.2021	Glaser	Maßstab:	1:5
Freigabe			Zeichnungsnummer:	7.0580.01
Benennung:	P7195O EI90 customer's drawing with delta			Artikel-Nr.:
	Front-opening Counter P7195O EI90 with delta			auf Zg.
Dateiname:	WP_7195O7_0580_01_1_2SLDDR			