

Front-Opening Counter P 7097

Front-Opening Counter P 7097

This unit was designed for flush built-in into massive walls or partition walls.
It is for in- as well as for outdoor use in porters' lodges, prisons, embassies and customs offices.

Security

P 7097 is available in bulletproof classification FB4 up to FB 7
On request we send you the respective test certificate.

Operation


The unit is operated manually. Only after closing the inner cover plate, the carriage can be moved to the outside. The carriage locks in end positions.

Construction and finish

Solid, lacquered steel construction. Front cover, inner cover plate lacquered in RAL 9006 (white aluminium) as standard version.


Installation

From the outside, the unit is inserted into the prepared wall-opening. From above the inner cover plate of the counter is set into the cut-out of the desk and bolt together with the unit.
In any case, the unit needs to be appropriately supported to make sure that the counter does not bear the whole weight.
It should be also possible to dismantle the unit in case of later repairs and maintenance work will become necessary.

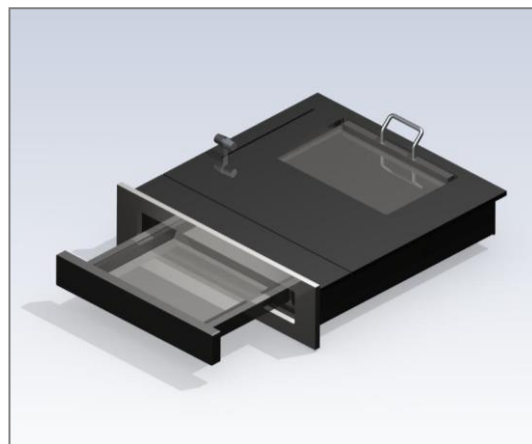

Possible variants:

Front-Opening Counter P 7097-FB4
Front-Opening Counter P 7097-FB6
Front-Opening Counter P 7097-FB7

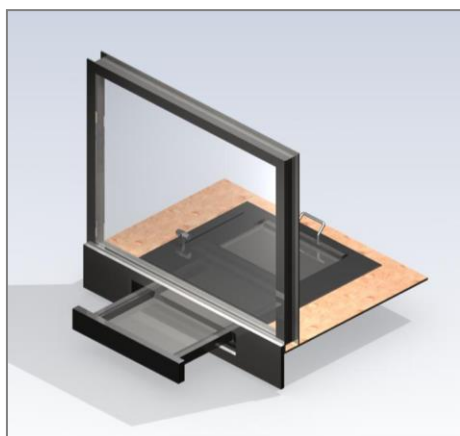

Picture: P 7097, window above by customer

Intercommunication system

We recommend our Intercom System Delta to allow customer-friendly communication between operator and customer.