

Front-Opening Counter P 7097/File-Delta

Front-Opening Counter P 7097 for files with Intercom System DELTA

This unit was designed for the flush built-in into the front or partition walls.

It is for in- as well as for outdoor use in porters' lodges, prisons, embassies and customs offices. Because of its internal height of 100 mm, files with wide spine can also be passed through.

Security

P 7097/File is built according to the bulletproof classifications FB4 up to FB 7. On request we send you the respective test certificates of the standard version P 7097.

Operation

The unit is operated manually. Only after closing the inner cover plate, the carriage can be moved to the outside. It locks in both end positions.

Tray and inner cover plate are interlocked which guarantees the bullet-resistance and at the same time prevents from unauthorized grasping in and draught at the workplace.

Construction and finish


Solid, lacquered steel construction. Front cover, inner cover plate as well as draught slide are lacquered in RAL 9006 (white aluminium) as standard version.

A complete intercom system SITEC-DELTA is integrated in the front-opening counter. An optional mounting of the capsule microphone in the window frame on eye level has to be checked by third party.

Installation


From the outside, the unit is inserted into the prepared wall-opening. From above the inner cover plate of the counter is set into the cut-out of the desk and bolt together with the unit. In any case, the unit needs to be appropriately supported to make sure that the counter does not bear the whole weight.

It should be also possible to dismantle the unit in case of later repairs and maintenance work will become necessary.

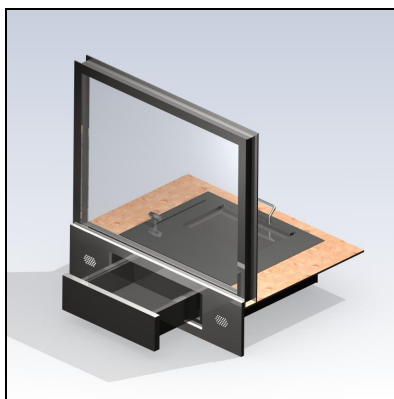

Picture: P 7097 O Delta, window above by customer

Intercommunication system SITEC-DELTA is integrated

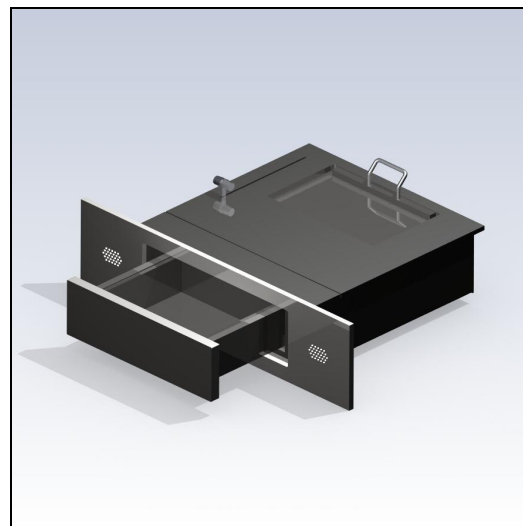

Scope of delivery

Front-Opening Counter P 7097/File-FB4 (Item No: 155661)

Front-Opening Counter P 7097/File-FB6 (Item No: 155725)

Front-Opening Counter P 7097/File-FB7 (Item No: 154556)

Possible variants

P 7097/File without integrated intercom. system

as well as combinations of the above, special constructions, e.g. for thicker walls, with different dimensions of the blind, special colors (RAL), stainless steel finish, etc.

Please contact us.

Security (Bulletproof according to DIN EN 1522): FB4-NS or FB6-NS or FB7-NS (all also acc. to BGV C9 - UVV Kassen)

Wall opening:

W x H = 885 x 200 mm

Strength of wall above max. 300 mm

Front cover :




L = 920 mm, H = 235 mm

Inner clearance:

W x H x D = 330 x 100 x 346 mm

Required information for order:

Name and bullet-resistance class

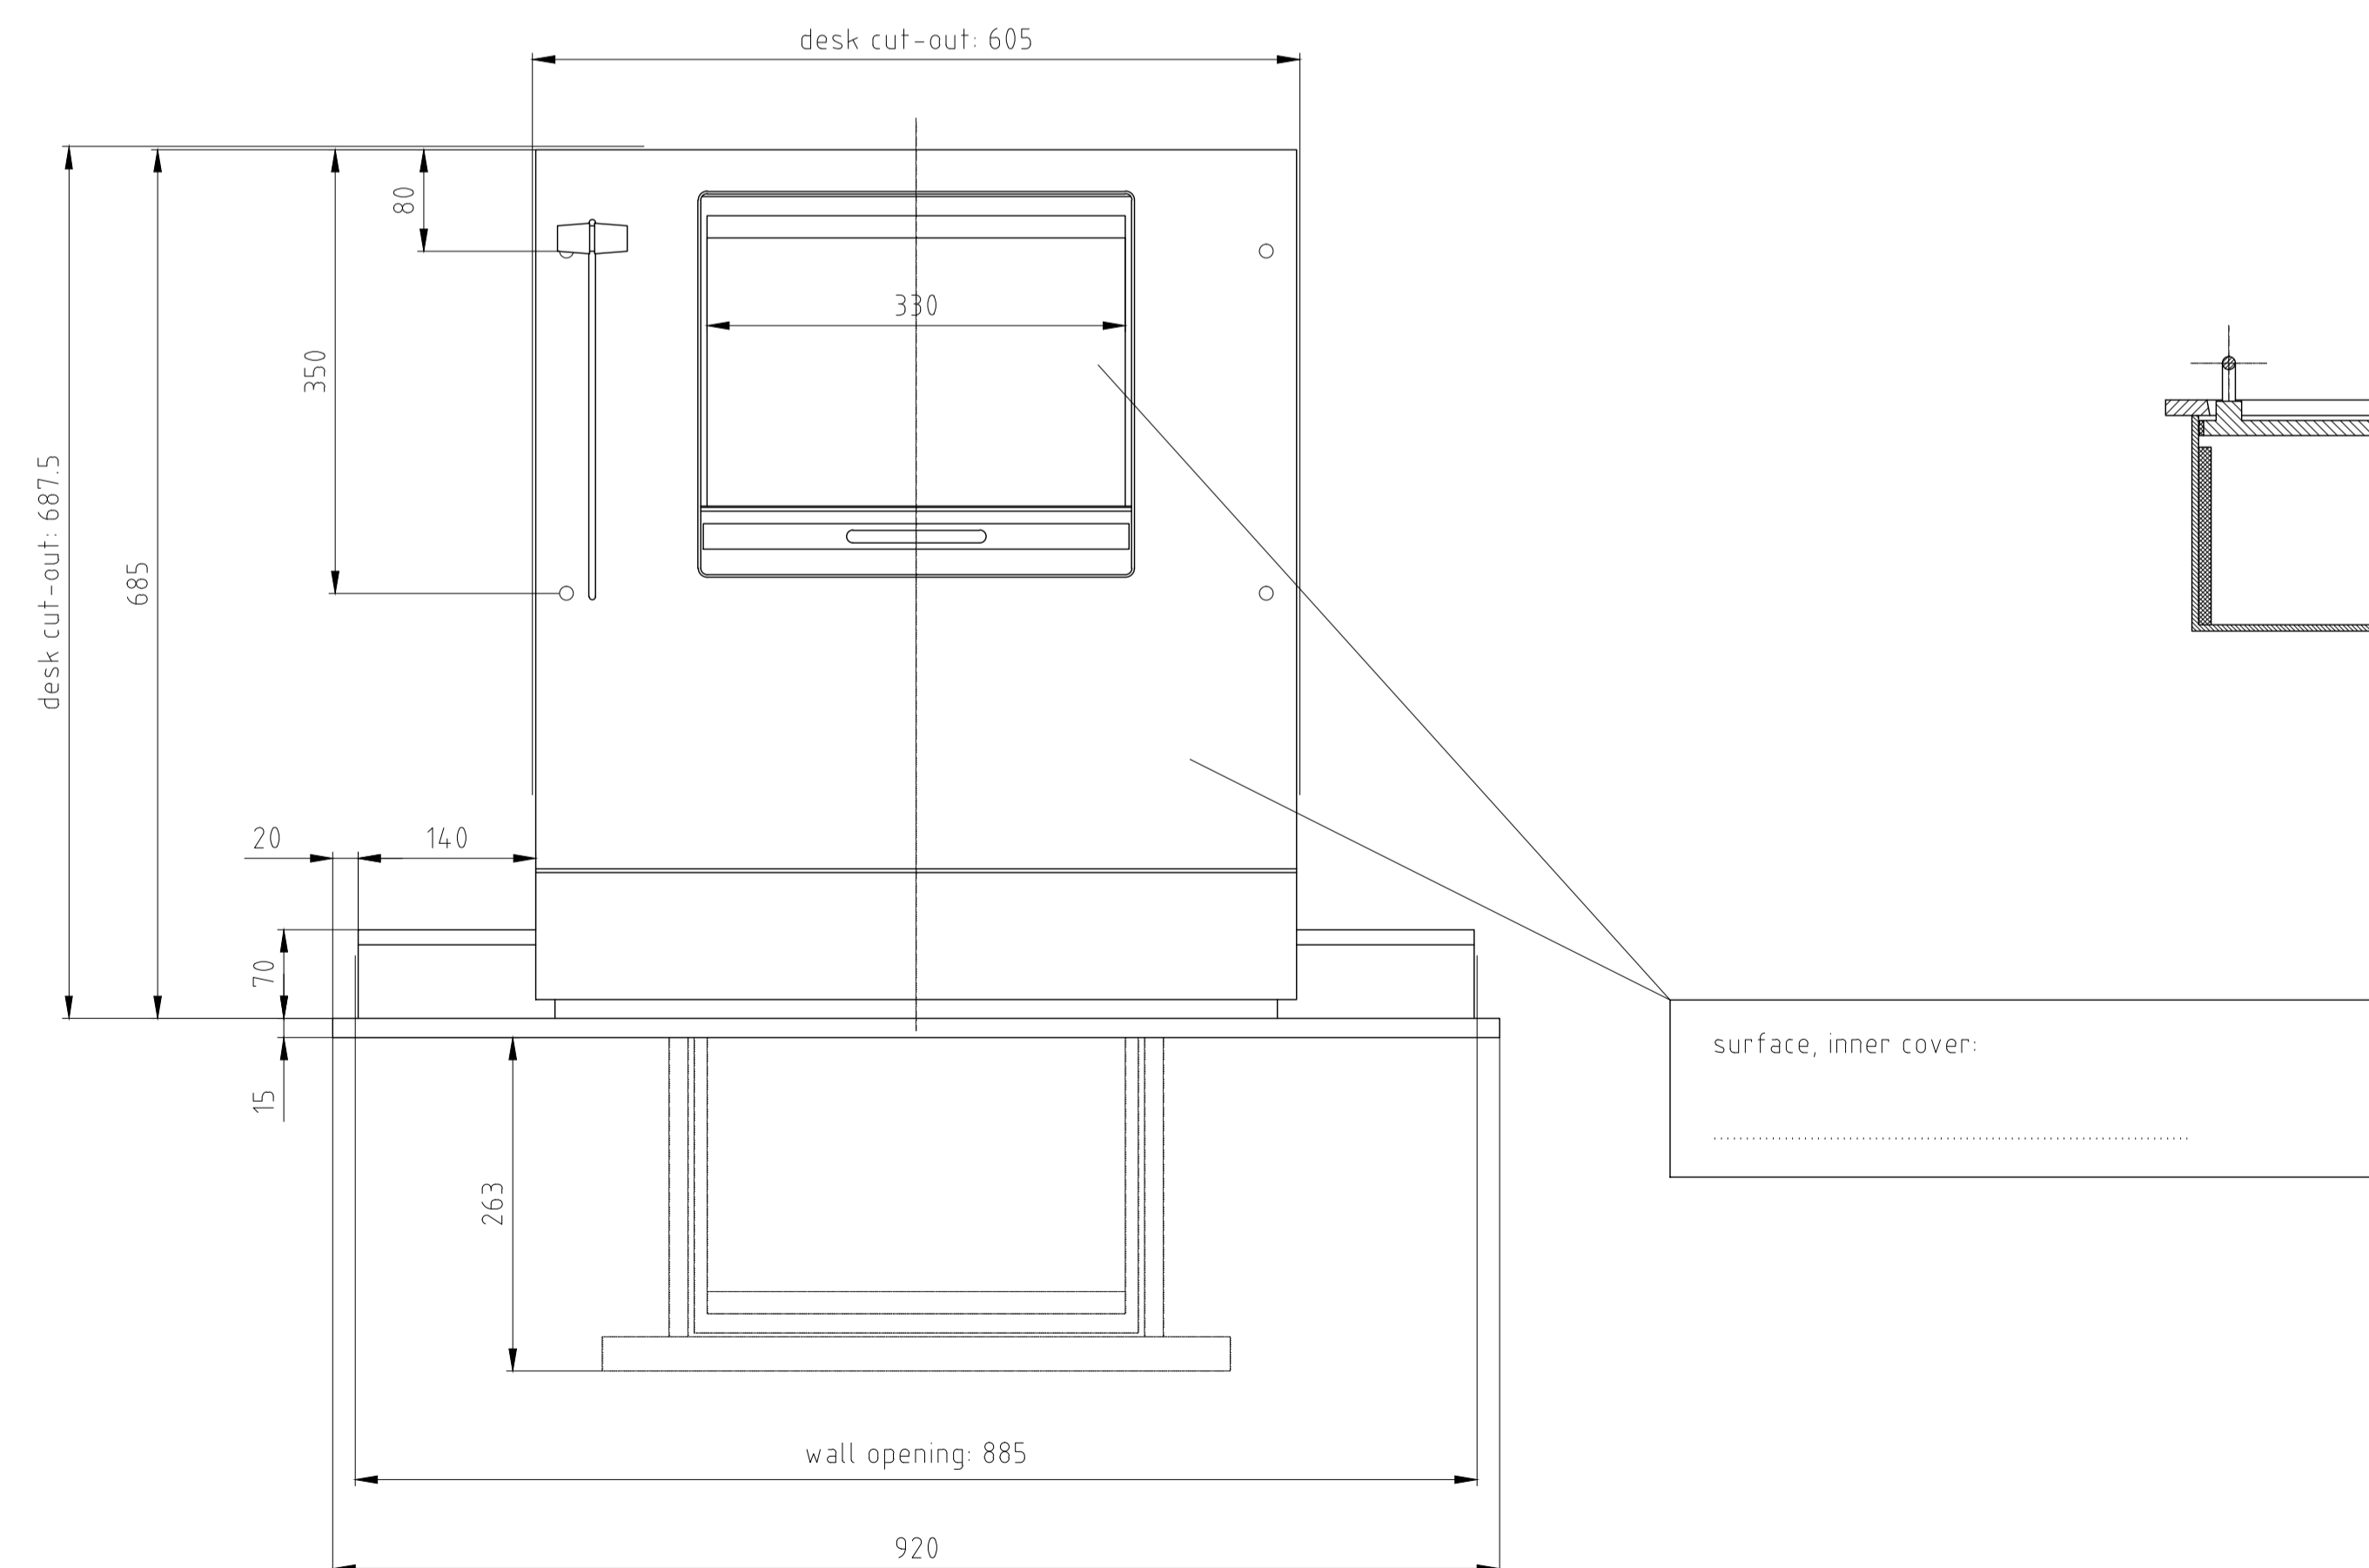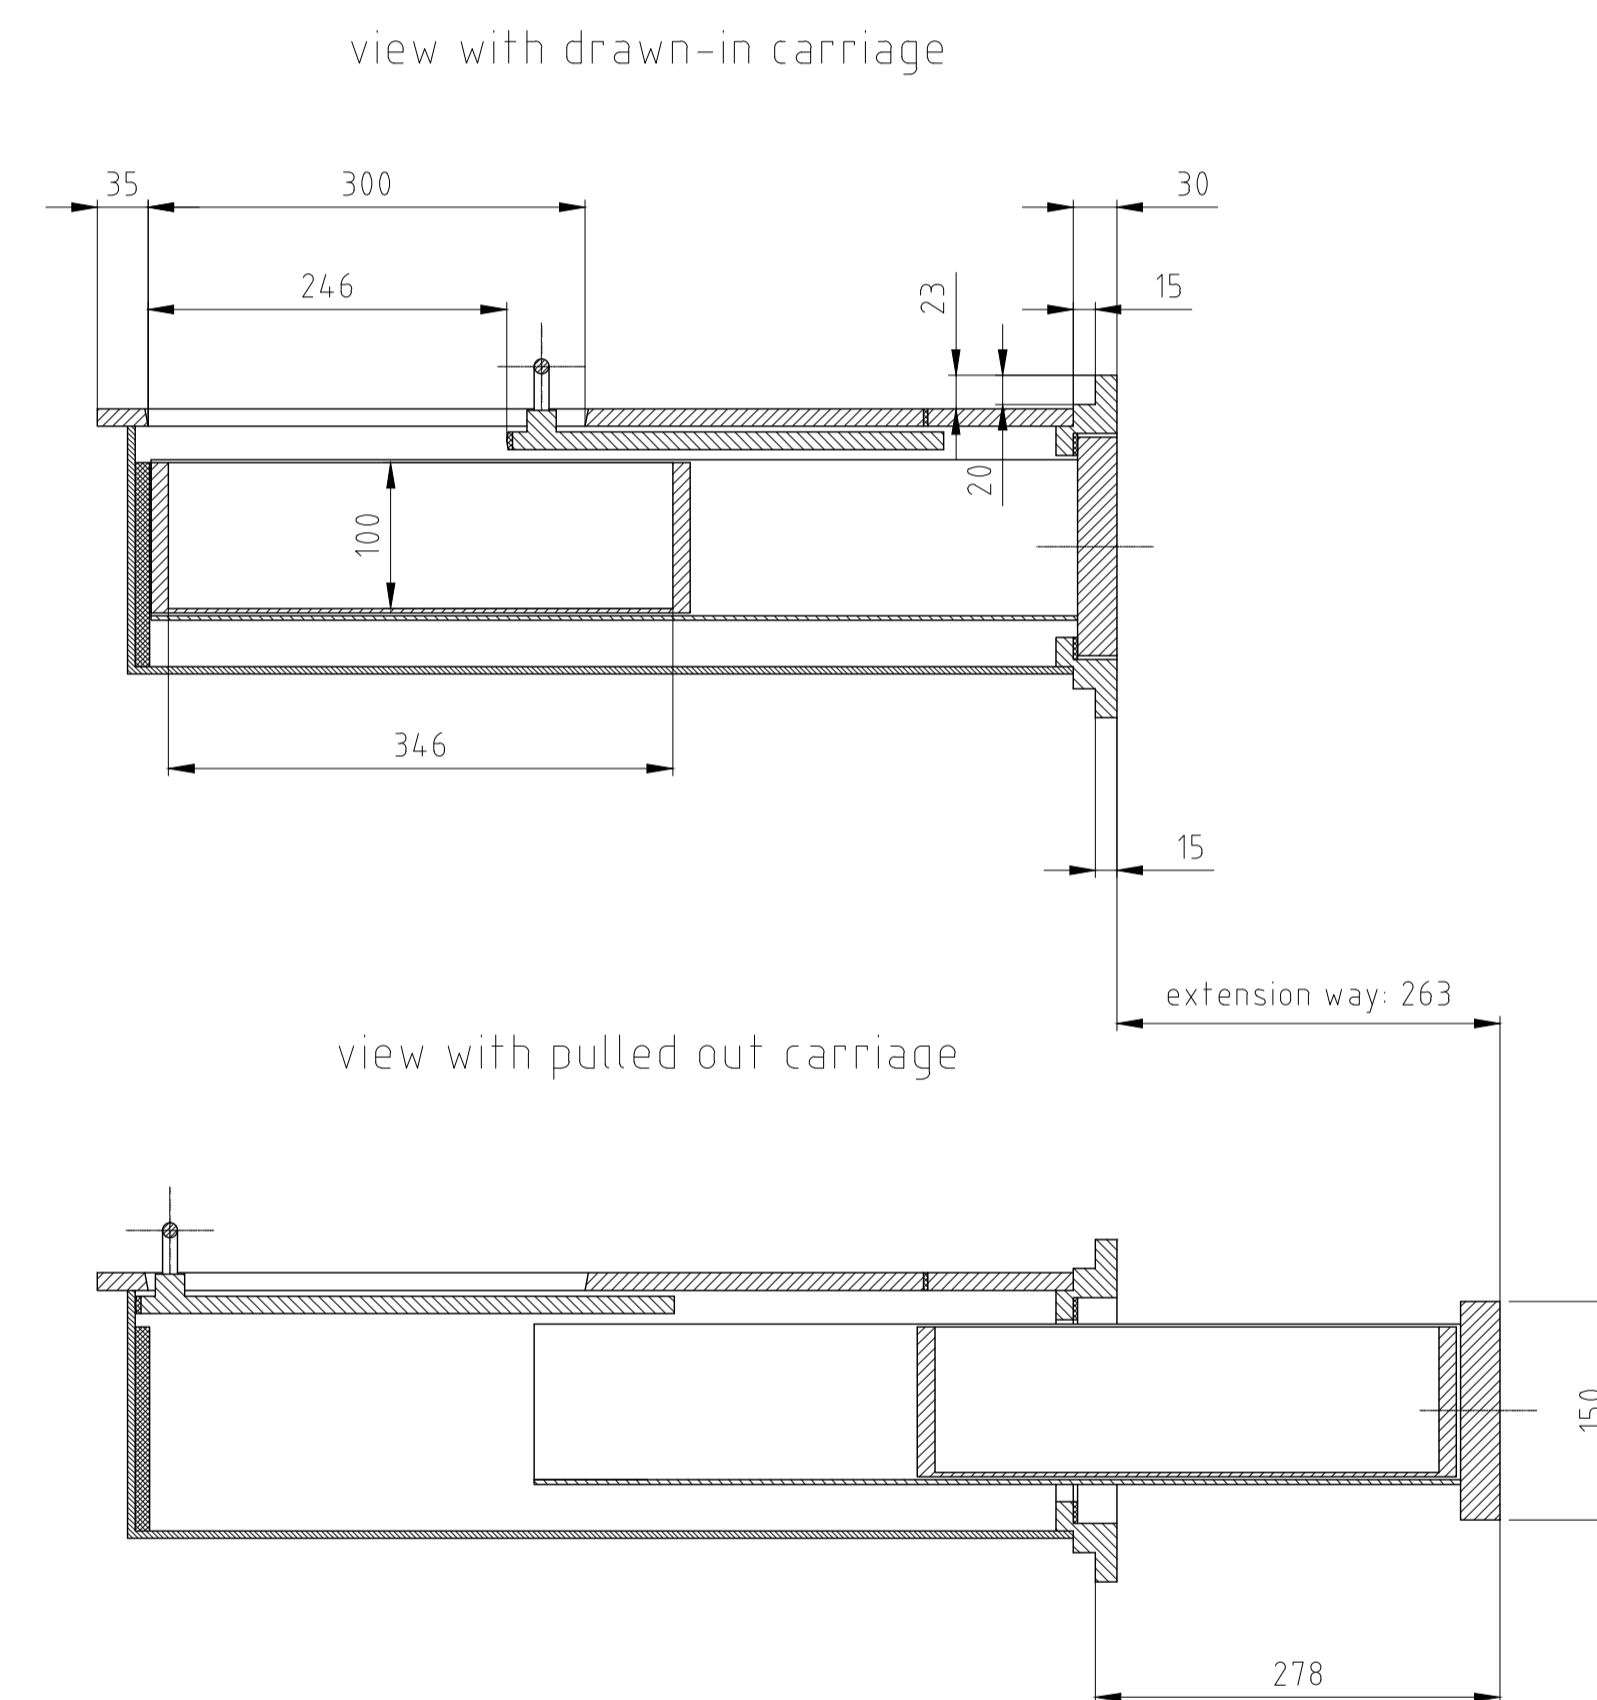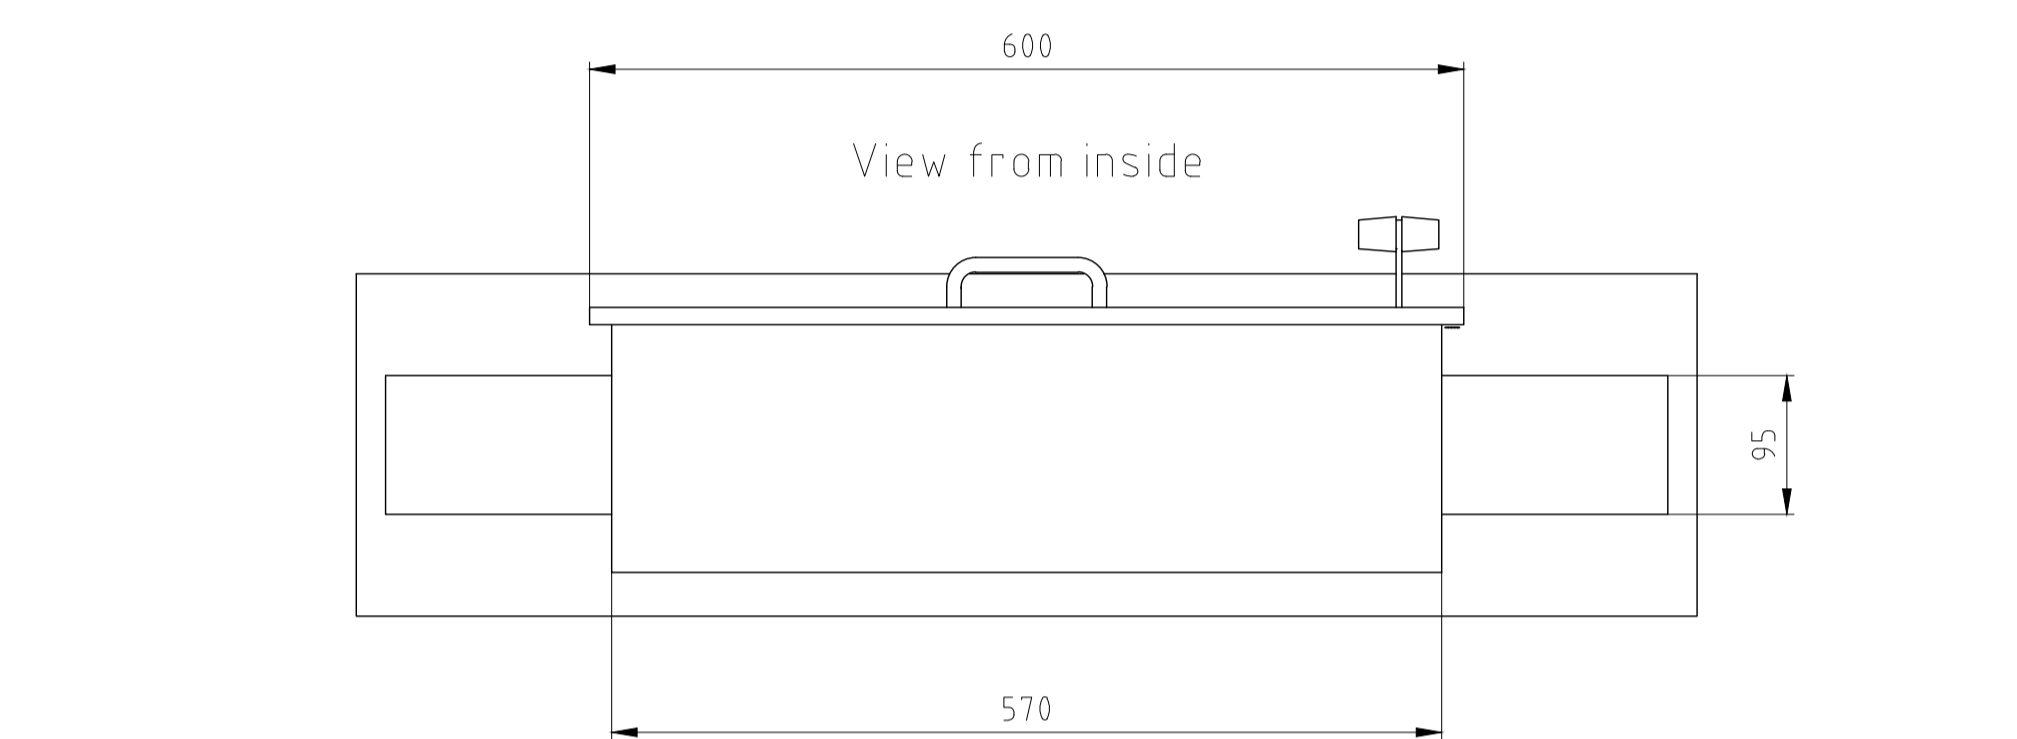

From the outside, the front-opening counter will be pushed into the ready cut-out. In case the strength of wall (less than 500 mm) is too small, the unit needs to be supported at the inside.

The casing has to be cladded by third party at the inside.

The drive is manually.

Although the unit is produced with greatest care, after long operation repairs might become necessary. Therefore it should be possible to pull out the unit to the outside.

Subject to alterations.

For requirement: FB4 + FB6 !

P 7097 0 Front-opening Counter
(FB4 + FB6 / with intercom system)

Production: pcs.

[...]	FB4, surface: Alu, laquered:	155661
[...]	FB4, surface: Alu, EV1 anodized:	155723
[...]	FB4, surface: stainless steel:	155724
[...]	FB6, surface: Alu, laquered:	155725
[...]	FB6, surface: Alu, EV1 anodized:	155726
[...]	FB6, surface: stainless steel:	155727
[...]	FB6, surface inner cover: stainless steel, surface front cover: Alu, laquered:	155728

approval for production		Allgemeintoleranzen DIN ISO 2768-Ts Tolerierung DIN ISO 8015		Auftrag P 70970						K			
		über über über über über		Projekt-Nr.: P 70970									
		bis 6 bis 10 bis 30 bis 100 bis 300 bis 1000		Kunde: Standardprojekt									
		±0,1 ±0,2 ±0,3 ±0,3 ±0,5 ±1,2											
		für Genauigkeit und Ebenheit ISO 2768 Toleranzklasse K											
date		±0,05 ±0,1 ±0,2 ±0,4 ±0,6 ±0,8		Werkstoff:		2 Delta 2.0		02.08.13		Nu			
		für Raumhaltigkeit ISO 2768 Toleranzklasse K				1 mit Delta		19.09.01		Sc			
stamp and signature		0,1 0,3 0,4 0,6 0,8 1				Verst. Änderung							
		Die Einzelwerte in dieser Toleranzangabe und sonstige Angaben verstehen Sie, wie Sie sind dem Empfänger nur zum persönlichen Gebrauch abzurufen. Diese Angaben sind dem Empfänger für die Fertigung zugeordnet. Die Fertigung ist für die Einhaltung der Toleranzen verantwortlich. Die Fertigung ist für die Einhaltung der Toleranzen verantwortlich. Die Fertigung ist für die Einhaltung der Toleranzen verantwortlich.		Wenn ohne Angabe: Kanten R4x0,2 Oberfläche Ra ISO 1302 Reiz Rz 50		Erst Geändert Geprüft		13.05.2009 03.06.2016		Massstab 1:5 7.0308.00		Format A1 Index 2	
		SITEC SITEC GMBH SOHNENFELDSTRASSE 19 42699 SOHNENFELD D-96369 Weiden TELEFON: 0926/60750 TELEFAX: 0926/60750		Benennung: P 70970 0 customer's drawing (with Delta) Pass through of folder		Name Datum		Zeichnungsnummer: 7.0308.00		Artikel-Nr.: auf Zg.		L	
				DIN EN ISO 9001:2015		Ilrsson							